

NOISELESS ABSORPTION MINIBAR RH 131 LD



GENERAL

- Noiseless absorption cooling
- Fuzzy Logic energy saving system
- Automatic defrost
- Certified according to ISO 9001 and 14001
- Complies with the ROHS-regulation of the EU
- Patented CUC cooling unit control system
- Door hinge changeable
- LED-Interior light
- Made in EU

DATA

Model class:	30 liter
Dimensions (H x W x D):	524 x 380 x 445 mm (built-in) LDBI-Version
Energy consumption:	0.73 kWh/24h
Energy efficiency index:	D
Cabinet:	Black, plastic coated steel case
Door:	Magnetic door seal
Features:	2x height adjustable shelves 1x door rack for small bottles, with adjustable dividers 1x door rack for bottles and cans, with bottle fingers



OPTIONS

- Lock
- Handle

VENTILATION OF THE COOLING UNIT

To ensure optimum cooling performance with minimum energy consumption, several basic principles need to be followed when installing an absorption miniBar. The heat which the cooling unit extract from the refrigerator interior is emitted at the back of the miniBar. There must be sufficient ventilation here to prevent a built-up of heat. The free ventilation space for incoming and outgoing air should be at least 200 cm². The distance from the rear of the miniBar to the rear wall of the furniture must be at least 2 cm. When installing the miniBar, ensure that it is standing on a stable and horizontal surface, and not directly near a heat source.

Outgoing air (warm) Incoming air (ambient)

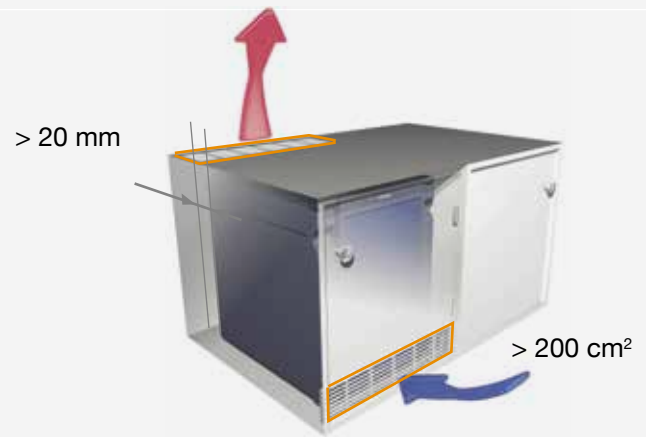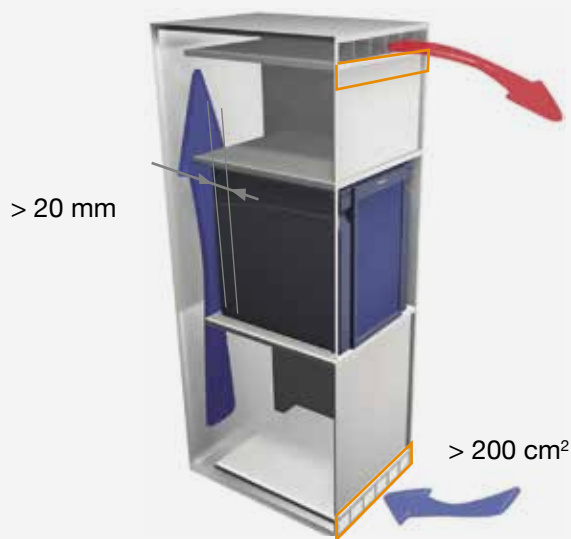

DRAWING

