



PS-32 MEAT GRINDER

Hourly output: up to 425 Kg.



SPECIFICATIONS

Production /hour (max): 425 Kg

Plate diameter: Ø 98 mm

Inlet mouth diameter (1) : 60 mm

Refrigerated mincer: No

Electrical connection: --

Total loading: 1500 W

External dimensions (WxDxH)

✓ Width: 310 mm

✓ Depth: 460 mm

✓ Height: 480 mm

Net weight: 33 Kg

Noise level (1m.): <70 dB(A)

Background noise: 32 dB(A)

IP Protection grade: 21

AVAILABLE MODELS

1050220 Motor unit PS-32 230-400/50/3 (without cutting unit)

1050221 Motor unit PS-32 220/60/3

1050209 Motor unit PS-32 400/60/3

* Ask for special versions availability

SALES DESCRIPTION

- ✓ The motor unit and the cutting units must be ordered separately.
- ✓ Available with stainless steel Enterprise system or Unger double cut system.
- ✓ 3-phase model only.
- ✓ 1 knife and a Ø 6 mm. mesh plate included.

Ideal for foodservice, communities and food retailers.

- ✓ **The motor unit and the cutting units must be ordered separately.**
- ✓ Stainless steel body.
- ✓ Powerful motor.
- ✓ Stainless steel mesh plate and knife.
- ✓ Easy-to-remove cutting unit for cleaning.
- ✓ Removable stainless steel hopper.
- ✓ Start-stop switch.
- ✓ Please note: as a result of continuous product improvements, these specifications are subject to change without prior notice.

INCLUDES

- ✓ Motor unit.

OPTIONAL

- ☐ Enterprise system, stainless steel cutting unit (double cut).
- ☐ Mesh plates of various sizes: 3 / 4.5 / 6 / 8 mm.
- ☐ Stainless steel Unger system

ACCESSORIES

- ☐ Mesh plates




PS-32 MEAT GRINDER

Hourly output: up to 425 Kg.



DYNAMIC PREPARATION
COMMERCIAL MEAT GRINDERS

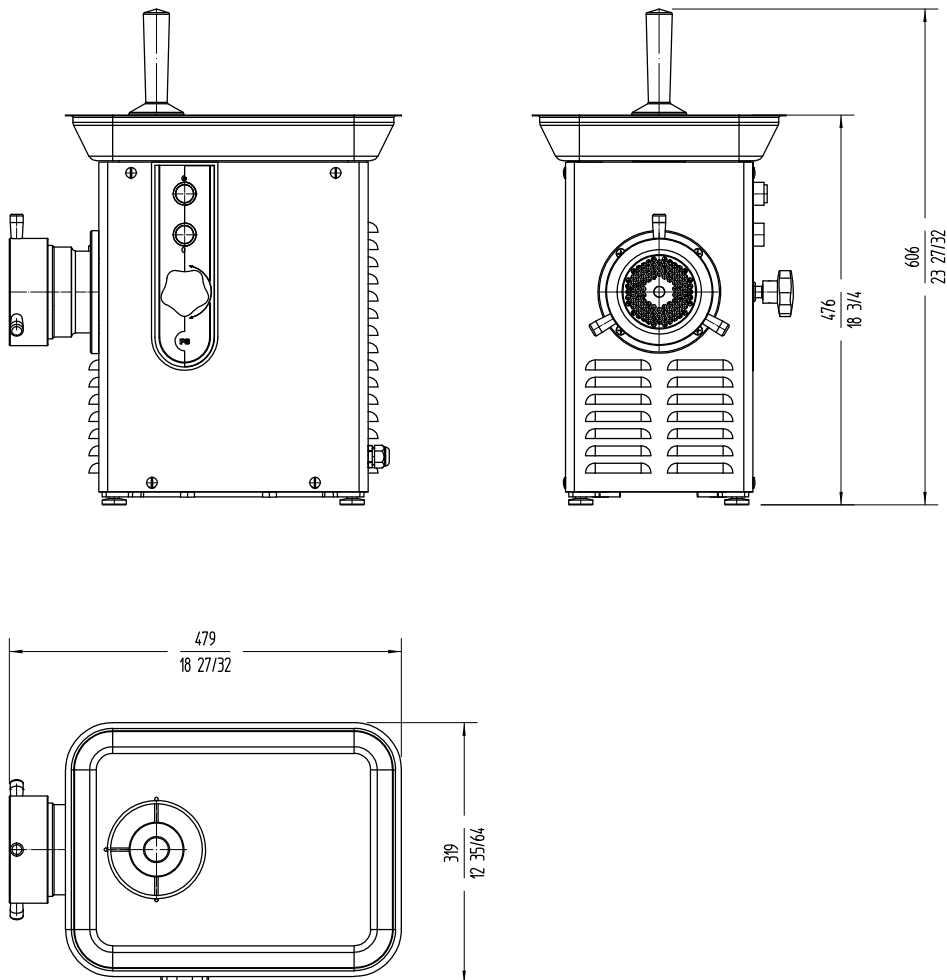

sammic | www.sammic.com
Food Service Equipment Manufacturer

Polígono Basarte, 1. phone +34 943 15 72 36
20720 Azkoitia, Spain sales@sammic.com



Project	Date
Item	Qty
Approved	

product sheet
updated 26/10/2022